

D.E.C.T 603

Digital Enhanced Cordless
Telecommunications

No Touch wireless Intercom




Handsfree wall/desk
mount option

Cordless
handset
option

Transmitter

High quality
speech panel
options

- Up to 500 meters open field range!
- Working range of 200 meters through 1 exterior concrete, brick or stone wall.
- Up to 4 handsets / indoor units per system.
- Build in voicemail feature to record missed callers at your door or gate (playback from handset).
- Intercall between handsets.
- 2 year warranty.

D.E.C.T 603

Digital Enhanced Cordless
Telecommunications

No Touch wireless Intercom





Technical Details			
Outdoor Unit		Indoor Unit	
Relays	2	Power Supply	Charging Base = 5v dc. Wall Unit = 12v dc.
Construction	Marine Stainless & Powder Coated Aluminium	Volume Adjust	Yes
Keypad Relays	3	Voicemail Capacity	16
Power Supply	24v DC (included)	Calling Between Handsets	Yes
Current Consumption	65mA Standby, 400mA Calling	Tag/Card Quantity	200 permanent, 20 time restricted, 30 temporary users

D.E.C.T 603

Digital Enhanced Cordless
Telecommunications

No Touch wireless Intercom

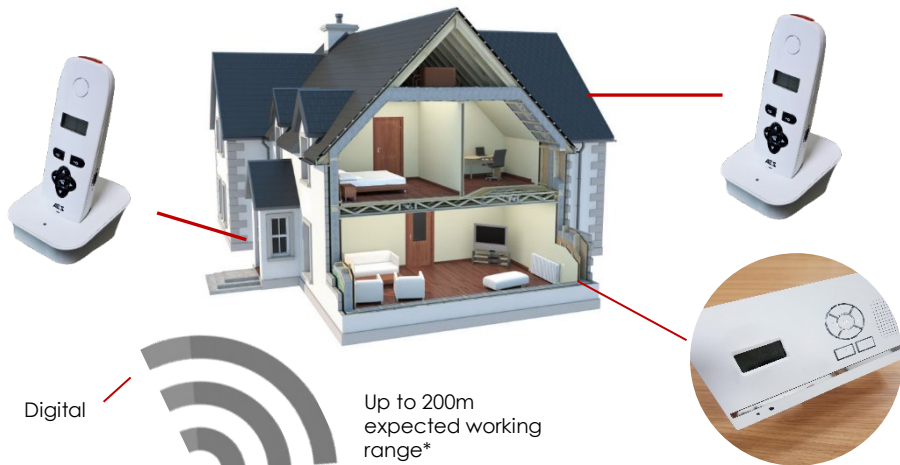

Perimeter wall/fence



*Range varies according to
building construction, obstacles,
shrubs, trees, height of transmitter,
etc.



603-AB-NT



603-HF-AB-NT



Stylish curved architectural model. Constructed from BS316 marine grade stainless steel and finished with gloss black acrylic trim and no touch call point sensor. Modern blue backlighting.

603-PX-AB-NT



603-PX-HF-AB-NT





Stylish curved architectural model. Constructed from BS316 marine grade stainless steel and finished with gloss black acrylic trim. With integrated Prox reader and no touch call point sensor. Modern blue backlighting


D.E.C.T 603

Digital Enhanced Cordless
Telecommunications

NO TOUCH SENSOR BUTTON



BLUE Light
Standby



Green light
Active




Technical Details


Dimensions	34mm	Operating Temp	-20c~+55c (14-131F)
Contact Rate:	3A/125-250VAC	Operating Humidity	0-95% (relative humidity)
Power	12-24VDC	Detection Range	5-10cm
Waterproof	IP68	LED indicator	BLUE LED (Standby) GREEN (Active)

Call Panel Dimensions


603-PX-AB-NT CALL PANEL

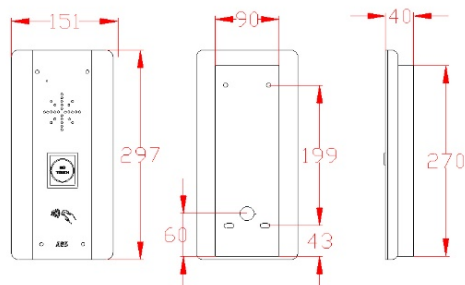


603-ABK-NT CALL PANEL

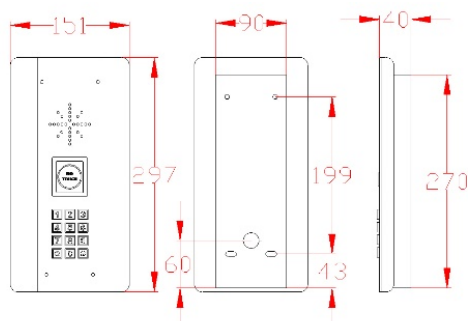

603-AB-NT CALL PANEL


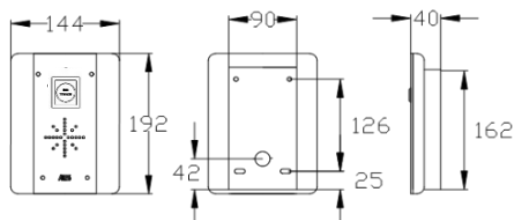


— 603-EH

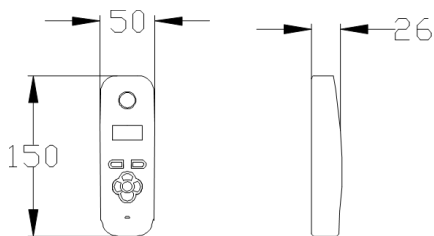


Additional handsets (up to total of 4 max per intercom, can be a mix and match of both styles.)

— 603-HF-EH




Desktop Bracket



Wall Mount Bracket

Additional handsets (up to total of 4 max per intercom, can be a mix and match of both styles.)

— 603-WIFA



Range boosting antenna which can be added to transmitter at gate and also optionally to the handsfree monitor type. One antenna can boost range by 30%. Comes with 2 metre antenna cable (RG174 with SMA male connector).