



PRAETORIAN GUARD

IP / 4G INTERCOMS







WWW.AESGLOBALONLINE.COM
ACCESS THE FUTURE





IP Video Intercom





Existing Wi-Fi Hub



Long Range Antenna *(2.4GHz) (up to 60m working range depending on router type and location)!

New Praetorian APP



Speak to your visitors from anywhere in the world.

- Grant access remotely Send a command to the gate motor via the app to open your gates etc.
- Keypad Codes 24-7 / Timed / Temporary (Optional)
- No Touch Access PROX Cards/ Tags 24-7 / Timed / Temporary (Optional)
- Voicemail Visitors can leave a video messages when unanswered.
- Multi-User Add up to 8 maximum devices per Intercom ID. (incl ADMIN user. 4 maximum for optimal performance.)
- Connect via WiFi, LAN Cable or 4G Access Point (Sold Seprately) (Dualband WIFI. 2.4 & 5.8G wifi (802.11 b/g/n/a/c)
- Coin Cell Battery to retain important system settings while a device is off. E.g. date-stamp.
- Volume of external speaker adjustable at the call-point.



^{* 2.4}GHz Antenna Incl, 5.8GHz available to purchase separately.

Installer / User App

App images for illustrative purposes only.





Events log for Keypad codes, Calls, Voicemails, Prox ID's. (past 100)



7-day schedule for auto relay opening.



Notifications - Motion Sensor is Triggered or Gates opened / closed via app, keypad or PROX.



Sync device time to device.



Prox & Keypad codes added via App.




View your camera in full screen mode.










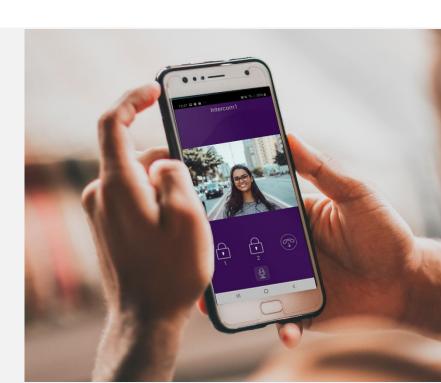





HD camera with video motion sensor

Colour camera with night vision and IR cut filter

Infra-red night vision illuminators



Illuminated IP67 push button

Optional illuminated keypad.





High gain Wi-Fi antenna 60 degree transmission to concentrate & extend range. Weatherproof for outdoor use.



2.4GHz Directional Antenna with 2m RG174 cable with SMA male connector.



	GENERAL		VIDEO	
Front Panel	Portrait Orientation AB/ABK = 3mm Acrylic on Architectural Design Marine Grade	Camera	HD 720p, dynamic (VGA – HD)	
	Stainless Steel BS316 Front Plate. AS/ASK = 3mm Marine Grade Stainless Steel BS316 on	Lens	120° (D), 109° (H), 65° (V) IR-capable	
	Architectural Design Marine Grade Stainless Steel BS316 Front Plate. FS/FSK = Flush Design Marine Grade Stainless Steel BS316 Front Plate. IMP/IMPK = 3mm Acrylic on Imperial Design Marine Grade Stainless Steel BS316 Front Plate. Modular = Powder Coated Marine Grade Stainless Steel BS316 Front Plates with 3mm Acrylic on Design Marine Grade, Stainless	Display Resolution	Switchable in the app by the Admin user. HD resolution: 1280*720 SD resolution: 640*480	
		Video Codec	H264	
		Night-Vision	Yes, light sensor, automatic IR-cut filter, 5 Infrared LEDs	
	Steel BS316 Modular Plates. Landscape Orientation PED = Pedestal Surface Mount	Storage	On-Board Micro SD Card (16GB included) Max read capacity 32GB	
Hood Cover (MOD, IMP(K), PED versions)	Powder coated Aluminium		Estimated capacity based on 16GB: 5,592 Video Clips (3MB) {AVI.} 33,500 images (0.5MB) {JPG} Supports Hot Swapping. Auto overwrites oldest data at 80% capacity FAT32 Formatting	
Mounting Housing (Backbox)	Marine Grade Stainless Steel BS316			
Mounting Type	Surface-Mounted with backlighting, Flush-mounted version sold separately		MOTION SENSOR	
Call Button	Stainless-steel button with illuminated LED Ring	Туре	Active	
Weatherproof	IP55	Detection Type	Digital (Pixel-based)	
Approvals	CE, FCC		Changes of pixilation. This is processed by the CPU identifying any major/minor changes in pixels that is defined by a	
Dimensions	See Overview of Call Points		predetermined algorithm.	
Operating Temp.	-25 to +55°C / -13 to 131°F	Range	>5m, depends on environment, distance is fixed	
Power Supply	24V DC		AUDIO	
Power Supply Power Consumption	IP PCB w/Keypad & Prox Standby = 80mA		Speaker and microphone, noise reduction and echo cancellation (ANR, AEC)	
	IP PCB w/Keypad & Prox	Audio Streaming	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app)	
Power Consumption	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum)		Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex	
Power Consumption Solar Power	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output	Audio Streaming	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app)	
Power Consumption Solar Power	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button	Audio Streaming	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW	
Power Consumption Solar Power Connectors	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock	Audio Streaming Audio Codec	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW	
Power Consumption Solar Power Connectors	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband	Audio Streaming Audio Codec WiFi	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac	
Power Consumption Solar Power Connectors	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps,	Audio Streaming Audio Codec WiFi WiFi Security	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3	
Power Consumption Solar Power Connectors System Requirement	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna) Camera lens should be at a min. height of 145 cm (57 in). Before the	Audio Streaming Audio Codec WiFi WiFi Security Frequency Range Ethernet	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3 2.4GHz-2.4385GHz; 5.15GHz-5.845GHz	
Power Consumption Solar Power Connectors System Requirement	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna)	Audio Streaming Audio Codec WiFi WiFi Security Frequency Range Ethernet	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3 2.4GHz-2.4385GHz; 5.15GHz-5.845GHz IEEE 802.3 SHTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP	
Power Consumption Solar Power Connectors System Requirement	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna) Camera lens should be at a min. height of 145 cm (57 in). Before the	Audio Streaming Audio Codec WiFi WiFi Security Frequency Range Ethernet Supported Protocol	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3 2.4GHz-2.4385GHz; 5.15GHz-5.845GHz IEEE 802.3 SHTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP	
Power Consumption Solar Power Connectors System Requirement Recommended Installation Height	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna) Camera lens should be at a min. height of145 cm (57 in). Before the installation please determine your optimal installation height.	Audio Streaming Audio Codec WiFi WiFi Security Frequency Range Ethernet Supported Protocol	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3 2.4GHz-2.4385GHz; 5.15GHz-5.845GHz IEEE 802.3 SHTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP 4G ROUTER 24V DC	
Power Consumption Solar Power Connectors System Requirement Recommended Installation Height	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna) Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height. See www.aesglobalonline.com/warranty	Audio Streaming Audio Codec WiFi WiFi Security Frequency Range Ethernet Supported Protocol Power Supply Interface	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3 2.4GHz-2.4385GHz; 5.15GHz-5.845GHz IEEE 802.3 SHTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP 4G ROUTER 24V DC Custom OpenWrt	
Power Consumption Solar Power Connectors System Requirement Recommended Installation Height Warranty Power Supply Steel Keypad	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna) Camera lens should be at a min. height of145 cm (57 in). Before the installation please determine your optimal installation height. See www.aesglobalonline.com/warranty KEYPAD MODULE 24V DC 12 Square Silicon Keys	Audio Streaming Audio Codec WiFi WiFi Security Frequency Range Ethernet Supported Protocol	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3 2.4GHz-2.4385GHz; 5.15GHz-5.845GHz IEEE 802.3 SHTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP 4G ROUTER 24V DC	
Power Consumption Solar Power Connectors System Requirement Recommended Installation Height Warranty Power Supply	IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA 45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -) s Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna) Camera lens should be at a min. height of145 cm (57 in). Before the installation please determine your optimal installation height. See www.aesglobalonline.com/warranty KEYPAD MODULE	Audio Streaming Audio Codec WiFi WiFi Security Frequency Range Ethernet Supported Protocol Power Supply Interface	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC) Two-way, full duplex & half-duplex (switchable in-app) PCM/ARAW NETWORK IEEE 802.11a/b/g/n/ac WPA / WPA2 / WPA3 2.4GHz-2.4385GHz; 5.15GHz-5.845GHz IEEE 802.3 SHTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP 4G ROUTER 24V DC Custom OpenWrt	

THIRD-PARTY INTEGRATIONS			
Partners	N/A - Coming Soon		
API	N/A - Coming Soon		

Slave connection to allow up to an additional 8 slave devices

12 Round Silicon Keys

Keypad Codes configurable via App,

Blue illumination

Silicon Keypad

Module

Direct Cable Connection 8 Pin Spring Connector Terminal Block (Linked to 1 $\rm x$ LAN ports) **GSM Modem Models** 4G Europe - SIM7600E 4G USA - SIM7600A 4G AUS/NZ - SIM7600SA Frequency Range LTE-TDD = B38/B40/B41 LTE-FDD = B1/B3/B5/B7/B8/B20 UMTS/HSPA+ = B1/B5/B8 GSM/GPRS/EDGE = 900/1800MHz RF Output Power (EIRP) 32.55dBm (GSM 900), 29.73dBm (DCS 1800) 23.77dBm (WCDMA Band I), 23.78dBm (WCDMA Band 22.79dBm, 22.73dBm, 22.97dBm, 22.35dBm, 22.99dBm (LTE B1, B3, B7, B8, B20)

IP MODULAR Video Intercom







PRAE-IP-MOD

1x1 Modular call panel with high gain Wi-Fi antenna. Button with modern blue lighting.





PRAE-IP-MOD-KP

1x2 Modular call panel with keypad and high gain Wi-Fi antenna. Keypad/button with modern blue lighting.







1x2 Modular call panel with **keypad** and **prox** reader. High gain Wi-Fi antenna. Keypad/button with modern blue lighting.





PRAE-IP-MOD-PX

1x2 Modular call panel with **prox** reader and high gain Wi-Fi antenna. Button with modern blue lighting.



MON-11

Wall mount touch screen monitor compatible with the **Praetorian system**. Can be an added accessory to all above kits.

PRAE-IP-IMP

(Kit includes speech panel, antenna, power supply and install manual)





Contemporary cool-white illuminated buttons.

Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood.

PRAE-IP-IMP-MONITOR1

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)





PRAE-IP-AB

(Kit includes speech panel, antenna, power supply and install manual)





PRAE-IP-AB-MONITOR1

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)





Modern blue back lighting effect.

Marine grade, brushed stainless steel construction with gloss acrylic trim.

PRAE-IP-AS

(Kit includes speech panel, antenna, power supply and install manual)





PRAE-IP-AS-MONITOR1

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)





Architectural model with contemporary cool-white illuminated buttons. Marine grade, brushed stainless steel construction.

PRAE-IP-PED

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-PED-MONITOR1

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)



Pedestal mountable & modern blue illuminated button. Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood.

Flush Mount Options

PRAE-IP-FS

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-FS-MONITOR1

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)



Flush Mount marine grade, brushed stainless steel construction. Contemporary cool-white illuminated button.

PRAE-IP-FB

(Kit includes speech panel, antenna, power supply and install manual)





PRAE-IP-FB-MONITOR1

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)





Flush mount marine grade, brushed stainless steel construction with gloss acrylic trim. Modern blue illuminated button.

PRAE-IP-IMPK

(Kit includes speech panel, antenna, power supply and install manual)





PRAE-IP-IMPK-MONITOR1

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)





Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood. Contemporary cool while illuminated buttons.

Prox panel: PRAE-IP-PX-IMPK

PRAE-IP-ABK

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-ABK-MONITOR1

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)





Modern blue back lighting effect.

Marine grade, brushed stainless steel construction with gloss acrylic trim.

Prox panel: PRAE-IP-PX-ABK

PRAE-IP-ASK

(Kit includes speech panel, antenna, power supply and install manual)





PRAE-IP-ASK-MONITOR1

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)





Architectural model with contemporary cool-white illuminated buttons & back lighting. Marine grade, brushed stainless steel construction.

Prox panel: PRAE-IP-PX-ASK

PRAE-IP-KP-PED

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-PX-PED-MONITOR1

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)



Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood. Modern blue illuminated buttons. Prox panel: PRAE-IP-PED-PX

Flush Mount Options

PRAE-IP-FSK

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-FSK-MONITOR1

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)





Flush Model with contemporary cool-white illuminated buttons. Marine grade, brushed stainless steel construction. Prox panel: PRAE-IP-PX-FSK

PRAE-IP-FBK

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-FBK-MONITOR1

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)



Flush model with modern blue lighting (keypad & button). Marine grade, brushed stainless steel construction with gloss acrylic trim. Prox panel: PRAE-IP-PX-FBK







4G-IP Video Intercom



New Praetorian APP

Praetorian Guard IP Intercom complete with 4G access point. The access point will provide an internet connection via a compatible SIM card*

- Speak to your visitors from anywhere in the world.
- Grant access remotely Send a command to the gate motor via the app to open your gates etc.
- Keypad Codes 24-7 / Timed / Temporary (Optional)
- No Touch Access PROX Cards/ Tags 24-7 / Timed / Temporary (Optional)
- Voicemail Visitors can leave a video messages when unanswered.
- Multi-User Add up to 8 maximum devices per Intercom ID. (incl ADMIN user. 4 maximum for optimal performance.)
- Wifi/LAN cable (Dualband WIFI. 2.4 & 5.8G wifi (802.11 b/g/n/a/c) can also be connected to a local Network.
- Coin Cell Battery to retain important system settings while a device is off. E.g. date-stamp.
- Volume of external speaker adjustable at the call-point.
- Vodafone SIM include for convenience. (UK/IRL markets only)
 - * MIN 1.5MB UPLOAD.
 - * MIN 1GB P/MIN DATA (Depending on usage).







4G-IP MODULAR Video Intercom

Network code for part number.

4GE (Europe) **4GA**(USA)

4GAU (Australia & NZ)





PRAE-4XX-MOD

Modular 1x1 call panel and 4G router. Button with modern blue lighting.





PRAE-4XX-MOD-KP

1x2 Modular call panel with keypad and 4G router. Keypad/button with modern blue lighting.





PRAE-4XX-MOD-PX-KP

Modular 1x2 call panel with **keypad** & **prox** reader and 4G router. Keypad/button with modern blue lighting.



PRAE-4XX-MOD-PX

Modular 1x2 call panel with **prox** reader and 4G router. Button with modern blue lighting.



Built in 4G Modular options

Network code for part number.

4GE (Europe)
4GA(USA)
4GAU (Australia & NZ)

Have the choice of a Module with 4G access point built into the Modular Unit.









Other kits and part numbers

PRAE-4GE/IMP (Europe)
PRAE-4GA/IMP (USA)
PRAE-4GAU/IMP (Australia & NZ)





PRAE-4GE/IMPK (Europe)
PRAE-4GA/IMPK (USA)
PRAE-4GAU/IMPK (Australia & NZ)





Contemporary cool-white illuminated buttons. Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood. (Kit includes speech panel, 4G modem, power supply and install manual)

Prox panel: PRAE-4G*/IMPK (*Network code)

PRAE-4GE/AB (Europe)
PRAE-4GA/AB (USA)

PRAE-4GAU/AB (Australia & NZ)





PRAE-4GE/ABK (Europe)
PRAE-4GA/ABK (USA)
PRAE-4GAU/ABK (Australia & NZ)





Modern blue back lighting effect. Marine grade, brushed stainless steel construction with gloss acrylic trim. (Kit includes speech panel, 4G modem, power supply and install manual)
Prox panel: PRAE-4G*/ABK (*Network code)

PRAE-4GE/AS (Europe)
PRAE-4GA/AS (USA)
PRAE-4GAU/AS (Australia & NZ)





PRAE-4GE/ASK (Europe)
PRAE-4GA/ASK (USA)
PRAE-4GAU/ASK (Australia & NZ)





Architectural model with contemporary cool-white illuminated buttons. Marine grade, brushed stainless steel construction. (Kit includes speech panel, 4G modem, power supply and install manual) Prox panel: PRAE-4G*/ASK (*Network code)

PRAE-4GE/PED (Europe)
PRAE-4GA/PED (USA)
PRAE-4GAU/PED (Australia & NZ)



PRAE-4GE/PED-KP (Europe)
PRAE-4GA/PED-KP (USA)
PRAE-4GAU/PED-KP (Australia & NZ)



Pedestal mountable & modern blue illuminated buttons. Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood. Built in 4G router. (Kit includes speech panel, power supply and install manual)

Prox panels: PRAE-4G*-PED-PX / PRAE-4G*-PED-KP (*Network code)

Flush Mount Options

PRAE-4GE/FS (Europe)
PRAE-4GA/FS (USA)
PRAE-4GAU/FS (Australia & NZ)





PRAE-4GE/FSK (Europe)
PRAE-4GA/FSK(USA)
PRAE-4GAU/FSK (Australia & NZ)



Flush Mount marine grade, brushed stainless steel construction. Contemporary cool-white illuminated buttons. (Kit includes speech panel, power supply and install manual) Prox panel: PRAE-4G*/FSK (*Network code)

PRAE-4GE/FB (Europe)
PRAE-4GA/FB(USA)
PRAE-4GAU/FB (Australia & NZ)





PRAE-4GE/FBK (Europe)
PRAE-4GA/FBK(USA)
PRAE-4GAU/FBK (Australia & NZ)






Flush mount marine grade, brushed stainless steel construction with gloss acrylic trim. Modern blue lighting (Keypad & buttons).

(Kit includes speech panel, power supply and install manual)

Prox panel: PRAE-4G*/FBK (*Network code)




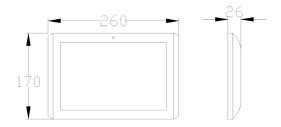

MON-11

- Wall mount touch screen monitor (1280x800 Resolution), compatible with the **Praetorian system**.
- 10.1 inch screen IPS LCD android screen.
- Wifi, Ethernet & Bluetooth connections.
- POE supplied (12V DC can be purchased separately)
- Complete with wall mount bracket.
- Android OS (8.1) with Praetorian app pre-loaded.
- RK3288, Quad-core cortex A17, 1.6G.

Call Panel Dimensions




MOD-1X1 (MODULAR)




MOD-1X2 (MODULAR)



PRAE-PED (Antenna on 4G panel only)

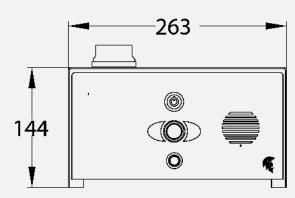


PRAE-PED-KP (Antenna on 4G panel only)

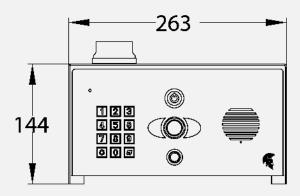

Call Panel Dimensions


PRAE-IMP Call Panel



PRAE-IMPK Call Panel




PRAE-AB & AS Call Panel



PRAE-ABK & ASK Call Panel




PRAE-FB & FS Call Panel



PRAE-FBK & FSK Call Panel



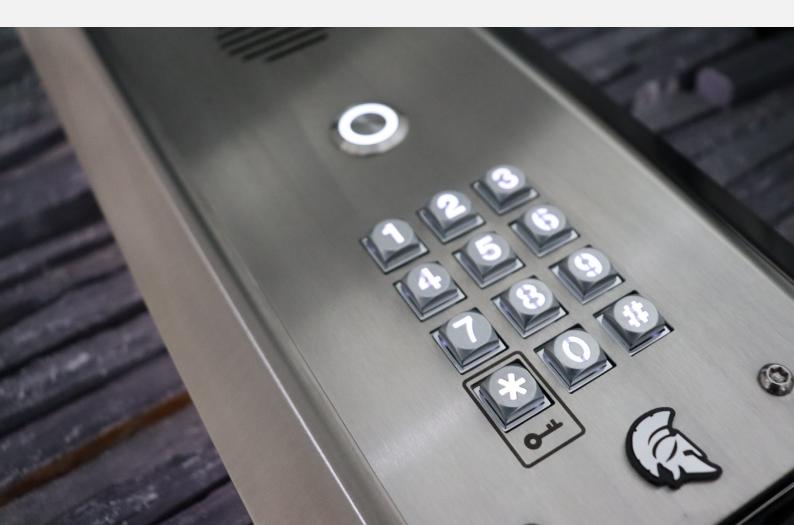









Follow us on social media!



www.aesglobalonline.com
E. sales@aesglobalonline.com
TEL. +44(0)288 639 0693